


X-Torque API grade Sucker & Pony Rod

Dimensions:

X-Torque is a Tenaris special connection designed to support high torques in progressive cavity pumping (PCP) operations.

Nominal Size		Units	Dr	Df	Ws	Lws (min)	DU	Lr	Ls
Rod	Pin								
1"	7/8"	in	1.00	1.625	1.00	1.25	1.500	0.394	1.909
			+0.009	+0.005	± 0.031		+0.004	+0.031	+0.039
		mm	-0.018	-0.01		-0.122	-0	-0.00	
			25.40	41.28	25.40	31.75	38.10	10.00	48.50
			+0.23	+0.12	±0.8	+0.1	+0.8	+1	
			-0.46	-0.25		-3.1	-0	-0	
1 1/8"	7/8"	in	1.125	1.703	1.30	1.25	1.709	0.394	1.875
			+0.01	+0.005	± 0.047		+0.008	+0.031	+0.062
		mm	-0.02	-0.01		-0.141	-0	-0.00	
			28.58	43.26	33.00	31.80	43.40	10.00	47.63
			+0.25	+0.12	±1.2	+0.2	+0.8	+1.58	
			-0.51	-0.25		-3.6	-0	-0	
1 1/8"	1"	in	1.13	2.00	1.52	1.50	1.90	0.61	1.88
			+0.01	+0.005	± 0.031		+0.008	+0.031	+0.062
		mm	-0.021	-0.01		-0.177	-0	-0.00	
			28.58	50.80	38.70	38.10	48.30	15.60	47.63
			+0.25	+0.12	±0.8	+0.2	+0.8	+1.58	
			-0.51	-0.25		-4.5	-0	-0	
1 1/4"	1"	in	1.25	2.00	1.41	1.50	2.08	0.39	1.88
			+0.01	+0.005	± 0.037		+0.004	+0.031	+0.062
		mm	-0.021	-0.01		-0.232	-0	-0.00	
			31.75	50.80	35.75	38.10	52.90	10.00	47.63
			+0.25	+0.12	±1.25	+0.1	+0.8	+1.58	
			-0.25	-0.25		-5.9	-0	-0.00	
1 1/4"	1 1/8"	in	1.25	2.25	1.49	1.63	2.19	0.39	2.13
			+0.01	+0.015	± 0.037		+0.004	+0.031	+0.062
		mm	-0.021	-0.015		-0.197	-0	-0.00	
			31.75	57.15	37.95	41.28	55.56	10.00	53.98
			+0.25	+0.38	±0.95	+0.1	+0.8	+1.58	
			-0.25	-0.38		-5.00	-0	-0	
1 1/2"	1 1/8"	in	1.50	2.25	1.49	1.63	2.19	0.39	2.13
			+0.01	+0.015	± 0.037		+0.004	+0.031	+0.062
		mm	-0.02	-0.015		-0.197	-0	-0.00	
			38.10	57.15	37.95	41.28	55.56	10.00	53.98
			+0.25	+0.38	±0.95	+0.1	+0.8	+1.58	
			-0.51	-0.38		-5.00	-0	-0	

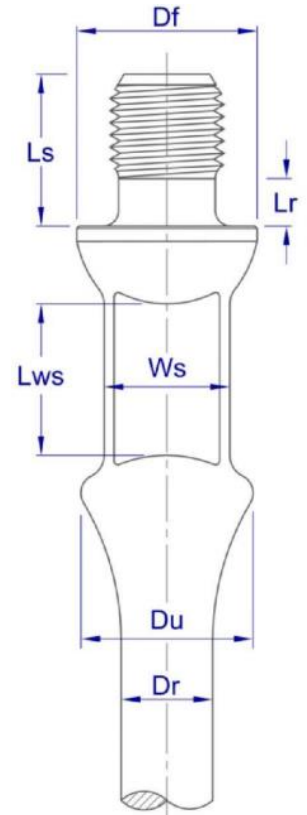

Sucker Rods Nominal Lengths: 25, 30 ft (7.62, 9.14 m)

Pony Rods Nominal Lengths:* 2, 4, 6, 8, 10, 12 ft (0.61, 1.22, 1.83, 2.44, 3.05, 3.66 m)

*Other lengths might be available upon request.

Steel Grades:

Different steel grades are available, depending on the type of load and the corrosion level in the wells. All this materials comply with API 11B.

Chemical Composition:

Typical chemical compositions (wt%) listed in the following table.

Grade	C	Mn	Si	S	P	Cr	Ni	Mo	Others
D Alloy	0.40-0.45	0.75-1.00	0.15-0.35	0.025 max	0.025 max	0.80-1.10	0.25 max	0.15-0.25	-
D Special	0.29-0.37	0.70-0.95	0.15-0.35	0.025 max	0.025 max	0.80-1.10	1.65-2.00	0.20-0.30	V: 0.04-0.08
D Special KD	0.20-0.25	0.80-1.00	0.15-0.35	0.025 max	0.025 max	0.70-0.90	1.15-1.50	0.25-0.30	V: 0.03-0.07

Mechanical Properties:

Mechanical properties are listed in the following table.

Grade	Yield Strength (0.2% offset)	Ultimate Tensile Stress	Elongation (8")	Reduction of area	Hardness
D Alloy	Min 95 kpsi (Min 655 Mpa)	120 to 140 kpsi (827 to 965 MPa)	10 % Min	45% Min	27 HRC
D Special	Min 100 kpsi (Min 689 Mpa)	125 to 140 kpsi (862 to 965 MPa)	10 % Min	45% Min	28 HRC
D Special KD	Min 85 kpsi (Min 586 Mpa)	115 to 140 kpsi (793 to 965 MPa)	10% Min	45% Min	25 HRC

Performance Data:

Maxium Operative Torque:

The maximum operative torque values were determined in full-scale tests.

Tenaris recommends the end user to determine the von mises effective stress of each application and not to exceed the rod body yielding stress.

Tenaris recommends the use of a 0.75 Service Factor depending on the operative conditions (dynamic loading and environment).

Nominal Size		Maxium Operative Torque		
Rod	Pin	D Alloy	D Special	D Special KD
1"	7/8"	963 Lb.ft (1305 N.m)	1016 Lb.ft (1377 N.m)	867 Lb.ft (1175 N.m)
1 1/8"	7/8"	963 Lb.ft (1305 N.m)	1016 Lb.ft (1377 N.m)	867 Lb.ft (1175 N.m)
1 1/8"	1"	1648 Lb.ft (2234 N.m)	1733 Lb.ft (2349 N.m)	1477 Lb.ft (2002 N.m)
1 1/4"	1"	2247 Lb.ft (3046 N.m)	2354 Lb.ft (3191 N.m)	2033 Lb.ft (2756 N.m)
1 1/4"	1 1/8"	2247 Lb.ft (3046 N.m)	2354 Lb.ft (3191 N.m)	2033 Lb.ft (2756 N.m)
1 1/2"	1 1/8"	2996 Lb.ft (4062 N.m)	3157 Lb.ft (4280 N.m)	2728 Lb.ft (3698 N.m)

Maxium Pulling Force:

Grade	Rod Outer Diameter				
	1"	1 1/8"	1 1/8"	1 1/4"	1 1/2"
D Alloy	59.7 klb (27.1 Ton)	75.6 klb (34.3 Ton)	75.6 klb (34.3 Ton)	93.3 klb (42.3 Ton)	134.3 klb (60.9 Ton)
D Special	62.8 klb (28.5 Ton)	79.4 klb (36 Ton)	79.4 klb (36 Ton)	98.1 klb (44.5 Ton)	141.3 klb (64.1 Ton)
D Special KD	53.4 klb (24.2 Ton)	67.7 klb (30.7 Ton)	67.7 klb (30.7 Ton)	141.3 klb (64.1 Ton)	120.2 klb (54.5 Ton)

Color Code:

Rod's ends are painted according to the following table:



Grade	Color Code
D Alloy	Yellow
D Special	Orange
D Special KD	Orange

*Displayed colors are for guidance only.

Non Destructive Testing:

All raw material is carefully inspected using electromagnetic and/or ultrasonic methods to ensure the soundness of the final product.

Marking:

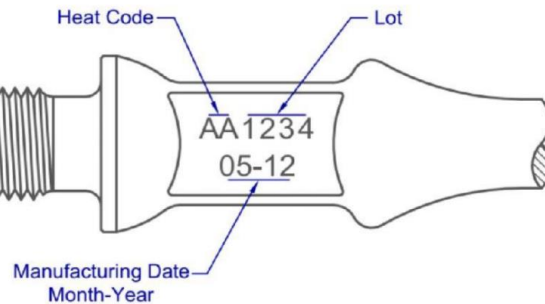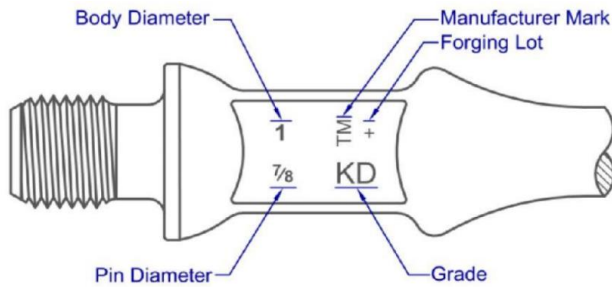

Labeling:*



Metalmecánica S.A.
Ruta 55 Km. 754,1
Villa Mercedes (San Luis)
Made in Argentina

BOX N°		QTY:
PRODUCT: SUCKER RODS		DATE:
SAP CODE:		
SPECIFICATION:		
ROD DIAM:	NET WEIGHT: (kg)	
END DIAM:		
GRADE:		
LENGTH: (ft)		
SALES ORDER:		PACKAGING TYPE:
DESTINATION:		THREAD PROTECTIO:

*Image for reference only.

Ordering Information:

When placing an order please attach the following information:

PDS: SRXTAPI
Product Family: Sucker Rod (or Pony Rod)
Body Diameter: 1"
Pin Diameter: 7/8"
Grade: D Special KD
Length: 25 ft

Tenaris has issued this document for general information only, and the information in this document is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information –if any- provided by the user in connection with, or for the purpose of, the information contained hereunder. The use of the information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any information contained hereunder or any use thereof. The information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be. Unless specifically agreed under such contract of sale or services, if Tenaris is required to provide any warranty or assume any liability in connection with the information contained here under, any such warranty or liability shall be subject to the execution of a separate written agreement between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. All rights reserved. ©Tenaris 2024