

PDS: SRPRCP

Short Name: Q03


Effective Date: 13/10/2017

First edition

Chrome Plated Polished Rod

Dimensions:

Tenaris

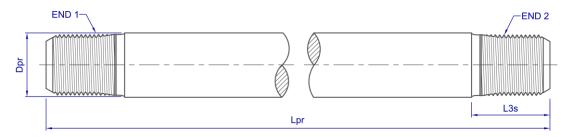

| | Nominal Size | | - | |
|--------|--------------|-------------------------|------------------------------------|-------|
| Rod | Pin | Units | Dpr | L3s |
| | | in | 1.125 +0.005 | 1.156 |
| 1 1/8" | 5/8" PR | mm | -0.01 28.58 +0.125 -0.255 | 29.35 |
| 1 1/8" | 3/4'' PR | in | 1.125 +0.005 -0.01 | 1.406 |
| , 0 | mm | 28.58 +0.13 -0.25 | 35.7 | |
| 1 1/4" | 7/8'' PR | in | 1.25 +0.005 -0.01 | 1.406 |
| ± ±/ • | 770 110 | mm | 31.75 +0.13 -0.25 | 35.7 |
| 1 1/2" | in 1" PR | in | 1.5 +0.005 -0.01 | 1.78 |
| /- | | mm | 38.1 +0.13 -0.25 | 45.22 |

Avaliable Lengths* (Lpr): 8, 11, 16, 22, 26, 30, 36, 40 ft \pm 2" (2.438, 3.353, 4.877, 6.706, 7.925, 9.144, 10.973, 12.192 m \pm 50.8 mm)

^{*}Other lengths might be available upon request.

Steel Grades:

Chemical Composition:

Typical chemical compositions (wt%) listed in the following table.

| Gra | de | C (%) | Mn (%) | Si (%) | S (%) | P (%) | Cr (%) | Ni (%) | Mo (%) | Other (%) |
|------|-----|---------------|---------------|---------------|--------------|--------------|---------------|--------|---------------|-----------|
| C | | 0.43- 0.50 | 0.60- 0.90 | - | 0.035 max | 0.030 max | - | - | - | - |
| D al | loy | 0.38- 0.45 | 0.75- 1.00 | 0.15- 0.35 | 0.040 max | 0.030 max | 0.80- 1.10 | - | 0.15- 0.25 | - |

Mechanical Properties:

Mechanical properties are listed in the following table.

| Grade | Yield Strength (0.2% offset) | Ultimate Tensile Stress | Elongation (8") | Reduction of Area | Hardness |
|---------|---------------------------------|-------------------------------------|--------------------|----------------------|----------|
| С | - | 90 to 160 kpsi (621 to 1103 MPa) | - | - | - |
| D alloy | - | 95 to 160 kpsi (655 to 1103 MPa) | - | - | - |


Coating:

Chrome Plated: Double layer coated by electroplating process with anodic etching.

 Roughness (Ra):
 8-20 μin (0.203-0.508 μm)

 Min. Thickness:
 0.005 in (0.12 mm)

 Hardness:
 950-1150 HV

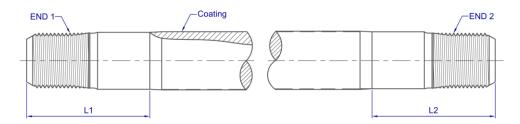


| Coating Length | L | .1 | L2 | | |
|-----------------------|---------------|-------------------------|---------------|-------------------------|--|
| Full length | 0'' | 0 mm | 0'' | 0 mm | |
| 1.5 ft free both ends | 18" (±2") | 457.2 mm (±50.8 mm) | 18'' (±2") | 457.2 mm (±50.8 mm) | |
| 1.5 ft free one end | 18'' (±2") | 457.2 mm (±50.8 mm) | 0'' | 0 mm | |
| 3 ft free both ends | 36'' (±2") | 914.4 mm (±50.8 mm) | 36'' (±2") | 914.4 mm (±50.8 mm) | |
| 3 ft free one end | 36'' (±2") | 914.4 mm (±50.8 mm) | 0'' | 0 mm | |
| 3.5 ft free both ends | 42'' (±2") | 1066.8 mm (±50.8 mm) | 42'' (±2") | 1066.8 mm (±50.8 mm) | |
| 3.5 ft free one end | 42'' (±2") | 1066.8 mm (±50.8 mm) | 0'' | 0 mm | |
| 4 ft free one end | 48'' (±2") | 1219.2 mm (±50.8 mm) | 0'' | 0 mm | |

Other dimensions might be avilable upon request


Non Destructive Testing:

All raw material is carefully inspected using electromagnetic and/or ultrasonic methods to ensure the soundness of the final product.

Marking:

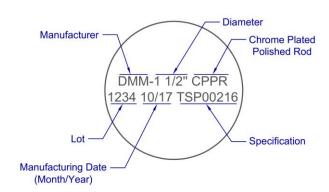

Labeling:

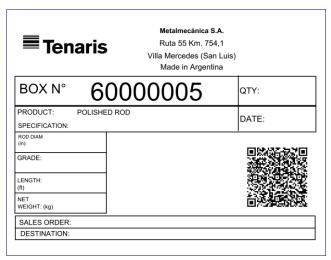

*Image for reference only

Ordering Information:

When placing an order please attach the following information:

PDS: SRPRCP
Body diameter: 1 1/8"
Pin: 5/8" PR

Surface finish: Chrome Plated

Grade: C
Length: 40 ft
Coating Length: Full length

Tenaris has issued this document for general information only, and the information in this document is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information—if any—provided by the user in connection with, or for the purpose of, the information contained hereunder. The use of the information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any information contained hereunder or any use thereof. The information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be. Unless specifically agreed under such contract of sale or services, if Tenaris is required to provide any warranty or assume any liability in connection with the information contained hereunder, any such warranty or liability shall be subject to the execution of a separate written agreement between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. All rights reserved. ©Tenaris 2017.