


# HolloRod™ Check Valve 2 7/8" EUE

## Dimensions:

### Pin API 2 7/8" EUE - Pin API 2 7/8" EUE

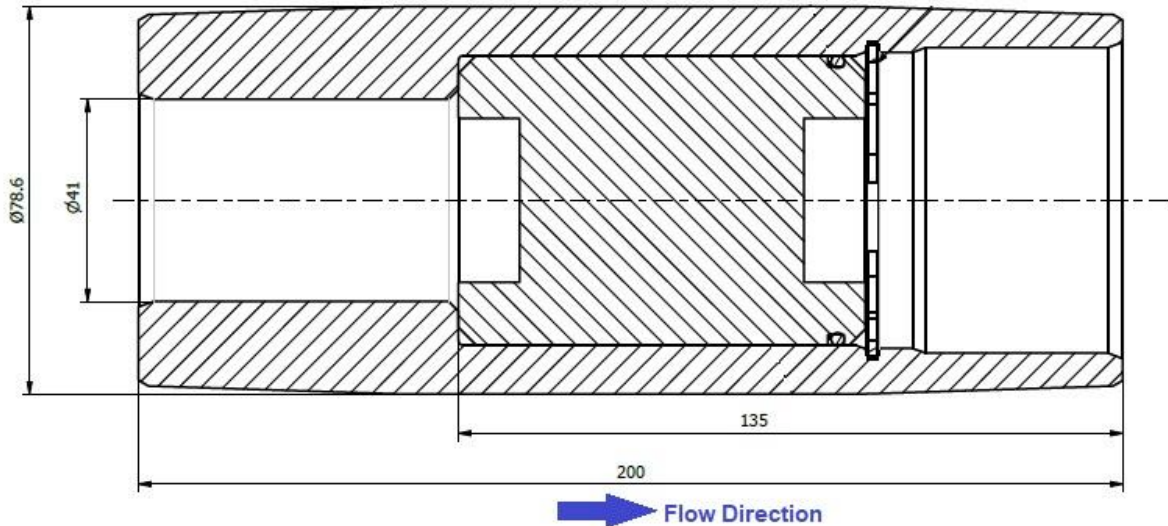

End Combination	OD	ID	L1	L2	Nominal Weight
Pin API 2 7/8" EUE – Pin API 2 7/8" EUE	3.094" (78.6 mm)	1.614" (41 mm)	7.874" (200 mm)	5.315" (135 mm)	8.77 lb (3.98 kg)

\* It can be used both as surface or downhole check valve.

## Steel Grades:

Valve body is made of AISI 4140 steel.

## Cartridge Specifications:

Cartridge	Material	O-Ring	Opening Pressure	Max. Recommended Working Pressure	Max. Temperature
K2224D 18-65	303 Stainless Steel	Viton	65 psi (448 kPa)	3000 psi (21 MPa)	399°C (204°C)

\* Each valve is inspected on a test bench using counterpressures up to 4500 psi to verify its sealability.