

Sucker Rod String: Coupling

PDS: SRCSRAR

Short Name: C23

Effective Date: 25/01/2024 Previous Revision: 19/11/2021

AlphaRod® API Sucker Rod Coupling

Dimensions:

Full Size:

Nominal Size	Units	OD	Lc* (min)	Lwfa	Weight
5/8"	in	1.500	4.000	1.252	1.17 lb
5/6	mm	38.1	101.6	31.8	(0.53 kg)
3/4"	in	1.625	4.000	1.252	1.4 lb
3/4	mm	41.3	101.6	31.8	(0.63 kg)
7/8"	in	1.811	4.000	1.252	1.72 lb
	mm	46.0	101.6	31.8	(0.78 kg)
1"	in	2.189	4.000	1.500	2.67 lb
-	mm	55.6	101.6	38.1	(1.21 kg)
1 1/8"	in	2.375	4.500	1.500	3.29 lb
	mm	60.3	114.3	38.1	(1.49 kg)

Slim Hole:

Nominal Size	Units	OD	Lc* (min)	Lwfa	Weight
5/8"	in	1.252	4.000	-	0.66 lb
5/8	mm	31.8	101.6	-	(0.3 kg)
3/4"	in	1.500	4.000	-	1.05 lb
5/4	mm	38.1	101.6	-	(0.48 kg)
7/8"	in	1.626	4.000	-	1.14 lb
	mm	41.3	101.6	-	(0.52 kg)
1"	in	2.000	4.000	-	1.95 lb
•	mm	50.8	101.6	-	(0.88 kg)
1 1/8"	in	2.258	4.500	-	2.74 lb
	mm	57.4	114.3	-	(1.24 kg)

To a second seco

*Other lengths might be available.

aWrench flats optional.

Slim Hole Plus:

Nominal Size	Units	OD	Lc* (min)	Lwfa	Weight
7/8" SH Plus	in	1.705	4.000	-	1.48 lb
7/6 SH Plus	mm	43.3	101.6	-	(0.67 kg)
1" SH Plus	in	2.090	4.000	-	2.31 lb
	mm	53.1	101.6	-	(1.05 kg)

Steel Grades:

Chemical Composition:

Typical chemical compositions (wt%) listed in the following table.

Grade	С	Mn	Si	S	P	Cr	Ni	Mo	Others
AlphaRod® CS	0.23	0.55	0.25	0.01	0.01	0.95	0.30	0.7	B: 0.01 max, Ti: 0.1 max, Nb: 0.1
Alphanoa C5	Alphanod C5 0.23	0.55	0.23	max	max	0.93	max	0.7	max
AlphaRod® HS	0.22	0.55	0.25	0.01	0.01	0.05	0.30	0.7	B: 0.01 max, Ti: 0.1 max, Nb: 0.1
Aipilanou no	0.23	0.55	0.25	max	max	0.95	max	0.7	max

Mechanical Properties:


Mechanical properties are listed in the following table.

Grade	Yield Strength	Ultimate Tensile Stress	Hardness
AlphaRod® CS	Min 90 kpsi	100 to 130 kpsi	20-28 HRC
Alphakod° CS	(Min 621 Mpa)	20-28 FRC	
AlabaDad® UC	Min 110 kpsi	125 to 155 kpsi	28-36 HRC
AlphaRod® HS	(Min 758 Mpa)	(862 to 1069 MPa)	20-30 FINC

Other Technical Data:

All the dimensions comply with API 11B, except for the OD in the 1 1/8" SH, 1" SH Plus and the 7/8" SH Plus couplings.


Marking:

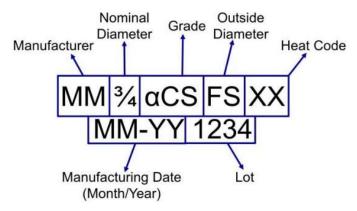

Non Destructive Testing:

All raw material is carefully inspected using electromagnetic and/or ultrasonic methods to ensure the soundness of the final product.

Labeling:*



*Image for reference only

Ordering Information:

When placing an order please attach the following information:

PDS: SRCSRAR Coupling Type: Coupling

Nominal dimension: 1"

Size: Full Size

Grade: AlphaRod® HS

Tenaris has issued this document for general information only, and the information in this document is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information –if any- provided by the user in connection with, or for the purpose of, the information contained hereunder. The use of the information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any information contained hereunder or any use thereof. The information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be. Unless specifically agreed under such contract of sale or services, if Tenaris is required to provide any warranty or assume any liability in connection with the information contained here under, any such warranty or liability shall be subject to the execution of a separate written agreement between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. All rights reserved. ©Tenaris 2024