

## AlphaRod® X-Torque Coupling

### Dimensions:

#### Full Size:


Nominal Size	Units	OD	Lc* (min)	Lwfa	Weight
7/8"	in	1.811	4.000	1.252	1.72 lb
	mm	46.0	101.6	31.8	(0.78 kg)
1"	in	2.189	4.000	1.500	2.67 lb
	mm	55.6	101.6	38.1	(1.21 kg)
1 1/8"	in	2.375	4.500	1.500	3.29 lb
	mm	60.3	114.3	38.1	(1.49 kg)

#### Slim Hole:

Nominal Size	Units	OD	Lc* (min)	Lwfa	Weight
7/8"	in	1.626	4.000	-	1.14 lb
	mm	41.3	101.6	-	(0.52 kg)
1"	in	2.000	4.000	-	1.95 lb
	mm	50.8	101.6	-	(0.88 kg)
1 1/8"	in	2.258	4.500	-	2.74 lb
	mm	57.4	114.3	-	(1.24 kg)

#### Slim Hole Plus:

Nominal Size	Units	OD	Lc* (min)	Lwfa	Weight
7/8" SH Plus	in	1.705	4.000	-	1.48 lb
	mm	43.3	101.6	-	(0.67 kg)
1" SH Plus	in	2.090	4.000	-	2.31 lb
	mm	53.1	101.6	-	(1.05 kg)

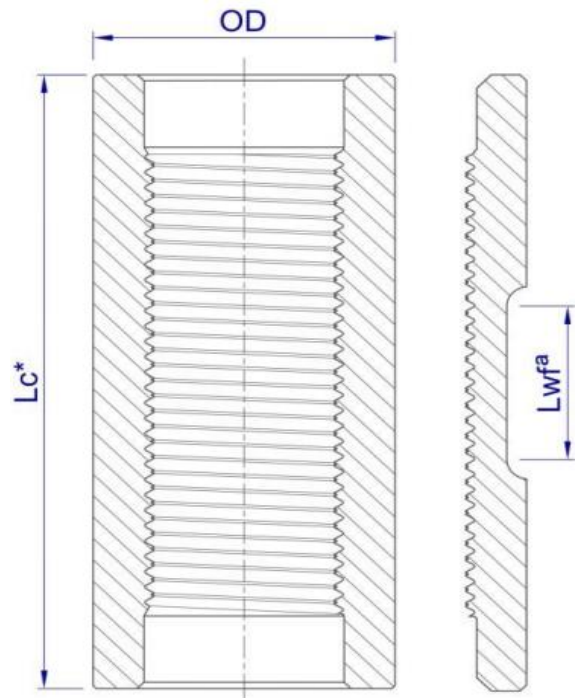

\*Other lengths might be available.  
 \*Wrench flats optional.

### Steel Grades:

#### Chemical Composition:

Typical chemical compositions (wt%) are listed in the following table.

Grade	C	Mn	Si	S	P	Cr	Ni	Mo	Others
AlphaRod® CS	0.23	0.55	0.25	0.01 max	0.01 max	0.95	0.30 max	0.7	B: 0.01 max, Ti: 0.1 max, Nb: 0.1 max
AlphaRod® HS	0.23	0.55	0.25	0.01 max	0.01 max	0.95	0.30 max	0.7	B: 0.01 max, Ti: 0.1 max, Nb: 0.1 max

#### Mechanical Properties:


Mechanical properties are listed in the following table.

Grade	Yield Strength	Ultimate Tensile Stress	Hardness
AlphaRod® CS	Min 90 kpsi (Min 621 Mpa)	100 to 130 kpsi (689 to 896 MPa)	20-28 HRC
AlphaRod® HS	Min 110 kpsi (Min 758 Mpa)	125 to 155 kpsi (862 to 1069 MPa)	28-36 HRC

## Other Technical Data:

Specially designed to improve torque performance.

## Marking:

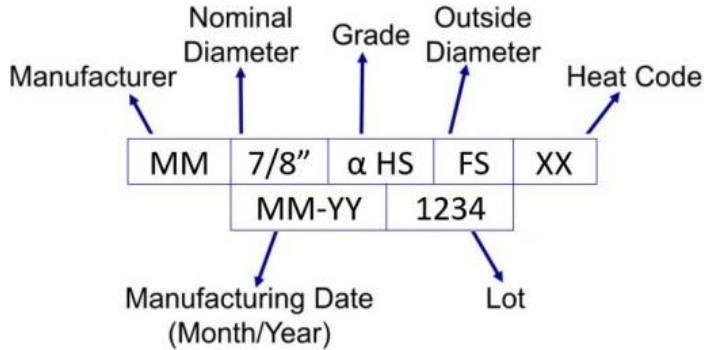

## Non Destructive Testing:

All raw material is carefully inspected using electromagnetic and/or ultrasonic methods to ensure the soundness of the final product.

## Labeling:\*

		Metalmecánica S.A. Ruta 55 Km. 754,1 Villa Mercedes (San Luis) Made in Argentina	
BOX N°		60000006	
PRODUCT:			
SPECIFICATION:			
QTY:	DATE:		
DIAM 1: (in)	DIAM 2: (in)		
CLASS:	TYPE:		
CLIENT:			
SALES ORDER:		NET WEIGHT: (kg)	
DESTINATION:			

\*Image for reference only

## Ordering Information:

When placing an order please attach the following information:

**PDS:** SRCXTAR  
**Coupling Type:** Coupling  
**Nominal dimension:** 1"  
**Size:** Slim Hole  
**Grade:** AlphaRod® HS

Tenaris has issued this document for general information only, and the information in this document is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information –if any– provided by the user in connection with, or for the purpose of, the information contained hereunder. The use of the information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any information contained hereunder or any use thereof. The information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be. Unless specifically agreed under such contract of sale or services, if Tenaris is required to provide any warranty or assume any liability in connection with the information contained here under, any such warranty or liability shall be subject to the execution of a separate written agreement between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at [www.tenaris.com](http://www.tenaris.com). All rights reserved. ©Tenaris 2024