

Reinforced Pin API grade Sucker & Pony Rod

Dimensions:


Nominal Size		Units	DRB	DPS	WWS	LWS	DUB	LSR	LSP
Rod	Pin								
3/4"	7/8"	max. in (mm)	0.758 (19.25)	1.630 (41.41)	1.031 (26.19)	-	1.502 (38.16)	0.703 (17.86)	1.688 (42.88)
		min. in (mm)	0.734 (18.64)	1.615 (41.03)	0.969 (24.61)	1.250 (31.75)	1.378 (35.01)	0.672 (17.07)	1.625 (41.28)
7/8"	1"	max. in (mm)	0.883 (22.43)	2.005 (50.93)	1.141 (28.99)	-	1.555 (39.50)	0.828 (21.03)	1.938 (49.23)
		min. in (mm)	0.859 (21.82)	1.990 (50.55)	1.079 (27.41)	1.250 (31.75)	1.378 (35.00)	0.797 (20.24)	1.875 (47.63)

*Dimensions according to API 11B.

Sucker Rods Nominal Lengths: 25, 30 ft (7.62, 9.14 m)

Pony Rods Nominal Lengths:** 2, 4, 6, 8, 10, 12 ft (0.61, 1.22, 1.83, 2.44, 3.05, 3.66 m)

**Other lengths might be available upon request.

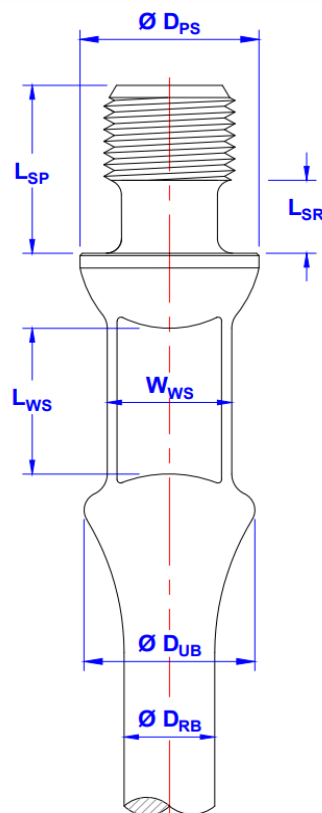

Steel Grades:

Different steel grades are available, depending on the type of load and the corrosion level in the wells. All these materials comply with API 11B. Grades C, K and DC carbon are only available under special request.

Chemical Composition:

Typical chemical compositions (wt%) listed in the following table.

Grade	C	Mn	Si	S	P	Cr	Ni	Mo	Others
DA Alloy	0.40-0.45	0.75-1.00	0.15-0.35	0.025 max	0.025 max	0.80-1.10	0.25 max	0.15-0.25	-
DS Special	0.29-0.37	0.70-0.95	0.15-0.35	0.025 max	0.025 max	0.80-1.40	1.20-2.00	0.15-0.30	V: 0.04-0.08
KDS Special	0.20-0.25	0.80-1.00	0.15-0.35	0.025 max	0.025 max	0.70-0.90	1.15-1.50	0.25-0.30	V: 0.03-0.07

Mechanical Properties:

Mechanical properties are listed in the following table.

Grade	Yield Strength (0.2% offset)	Ultimate Tensile Stress	Elongation (8")	Reduction of area	Hardness
DA Alloy	min 95 kpsi (min 655 MPa)	120 to 140 kpsi (827 to 965 MPa)	10 % min	45% min	27 HRC
DS Special	min 100 kpsi (min 689 MPa)	125 to 140 kpsi (862 to 965 MPa)	10 % min	45% min	28 HRC
KDS Special	min 85 kpsi (min 586 MPa)	115 to 140 kpsi (793 to 965 MPa)	10% min	45% min	25 HRC

Performance Data:

Maximum Pulling Force:

Grade	Rod Outer Diameter	
	3/4"	7/8"
DA Alloy	36.1 klb (16.4 t)	49.5 klb (22.5 t)
DS Special	38 klb (17.3 t)	52.1 klb (23.7 t)
KDS Special	32.3 klb (14.7 t)	44.3 klb (20.1 t)

To prevent tensile failures, the weight indicator pull on a "like new" condition rod string should not exceed 90% of the yield strength of the smallest diameter sucker rod, based on its known size and grade. Maximum pulling force values herein informed were calculated based on the 90% of the specified minimum yield strength at the smallest section of a given rod.

Beam Pumping: Maximum allowable tensile stress

It is recommended that the modified Goodman stress diagram or the simplified formula listed bellow are used in the determination of the allowable range of stress applied to a sucker rod.

$$S_a = \frac{UTS}{A} + B * S_{min} * SF$$

Applied tensions can be compared to the maximum allowable using the Goodman formula:

$$Goodman\% = \frac{S_{max} - S_{min}}{S_a - S_{min}} * 100$$

Table 1: Goodman coefficients.

Grade	A	B
DA Alloy	4	0.5625
DS Special	4	0.5625
KDS Special	4	0.5625

Where:

S_a = Maximum allowable stress (psi or Mpa)

S_{min} = Minimum calculated or measured stress (psi or Mpa)

S_{max} = Maximum calculated or measured stress (psi or Mpa)

UTS = Minimum ultimate tensile strength (psi or Mpa)

SF = Service factor. For corrosive environments a value of 0.9 is recommended

Coefficients A and B are listed on Table 1.

Progressive Cavity Pumping: Effective Stress

The effective rod stress in PCP applications can be calculated using the von Mises equation:

$$\sigma_e = \sqrt{\frac{(C_1 * L^2)}{\pi^2 * D^4} + \frac{C_2 * T^2}{\pi^2 * D^6}}$$

Where:

σ_e = Effective stress (kpsi or Mpa)

L = Total axial load (lbf or N)

T = Total torque (lbf. ft or N. m)

D = Rod's body diameter (in or mm)

C_1 = Constant (For imperial system= 1.6×10^{-5} . For international system= 16)

C_2 = Constant (For imperial system= 0.1106. For international system= 7.68×10^8)

Color Code:

Rod's ends are painted according to the following table:



Grade	Color Code
DA Alloy	Yellow
DS Special	Orange
KDS Special	Orange

*Displayed colors are for guidance only.

Non Destructive Testing:

All raw material is carefully inspected using electromagnetic and/or ultrasonic methods to ensure the soundness of the final product.

Marking:

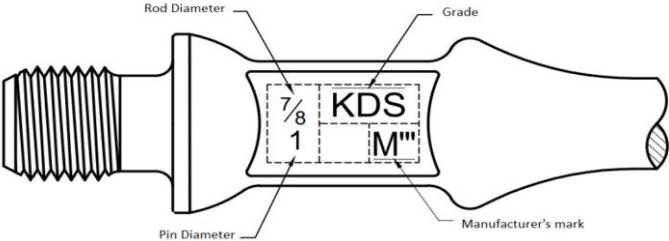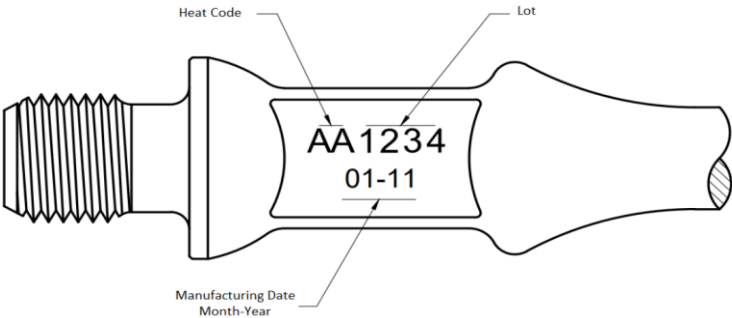

Grade	New Marking	Old Marking
DA Alloy	DA	D
DS Special	DS	DS
KDS Special	KDS	KD

Labeling:*



Metalmecánica S.A.
Ruta 55 Km. 754,1
Villa Mercedes (San Luis)
Made in Argentina

BOX N°		QTY:
PRODUCT: SUCKER RODS		DATE:
SAP CODE:		
SPECIFICATION:		
ROD DIAM:	NET WEIGHT: (kg)	
END DIAM:		
GRADE:		
LENGTH: (ft)		
SALES ORDER:		PACKAGING TYPE:
DESTINATION:		THREAD PROTECTIO

*Image for reference only.

Ordering Information:

When placing an order please attach the following information:

PDS: SRRPAPI
Product Family: Sucker Rod (or Pony Rod)
Body Diameter: 3/4"
Pin Diameter: 7/8"
Grade: KDS Special
Length: 25 ft

Tenaris has issued this document for general information only, and the information in this document is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information -if any- provided by the user in connection with, or for the purpose of, the information contained hereunder. The use of the information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any information contained hereunder or any use thereof. The information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be. Unless specifically agreed under such contract of sale or services, if Tenaris is required to provide any warranty or assume any liability in connection with the information contained here under, any such warranty or liability shall be subject to the execution of a separate written agreement between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. All rights reserved. ©Tenaris 2025