


AlphaRod® X-Torque Sucker & Pony Rod

Dimensions:

X-Torque is a Tenaris special connection designed to support high torques in progressive cavity pumping (PCP) operations.

Nominal Size		Units	Dr	Df	Ws	Lws (min)	DU	Lr	Ls
Rod	Pin								
1"	7/8"	in	1.00	1.63	1.00	1.25	1.50	0.39	1.91
			+0.009 -0.018	+0.005 -0.01	± 0.031		+0.004 -0.122	+0.031 -0	+0.039 -0.00
		mm	25.40	41.28	25.40	31.75	38.10	10.00	48.50
			+0.23 -0.46	+0.12 -0.25	±0.8		+0.1 -3.1	+0.8 -0	+1 -0
1 1/8"	7/8"	in	1.13	1.70	1.30	1.25	1.71	0.39	1.88
			+0.01 -0.02	+0.005 -0.01	± 0.047		+0.008 -0.141	+0.031 -0	+0.062 -0.00
		mm	28.58	43.26	33.00	31.80	43.40	10.00	47.63
			+0.25 -0.51	+0.12 -0.25	±1.2		+0.2 -3.6	+0.8 -0	+1.58 -0
1 1/8"	1"	in	1.13	2.00	1.52	1.50	1.90	0.61	1.88
			+0.01 -0.021	+0.005 -0.01	± 0.031		+0.008 -0.177	+0.031 -0	+0.062 -0.00
		mm	28.58	50.80	38.70	38.10	48.30	15.60	47.63
			+0.25 -0.51	+0.12 -0.25	±0.8		+0.2 -4.5	+0.8 -0	+1.58 -0
1 1/4"	1"	in	1.25	2.00	1.41	1.50	2.08	0.39	1.88
			+0.01 -0.021	+0.005 -0.01	± 0.037		+0.004 -0.232	+0.031 -0	+0.062 -0.00
		mm	31.75	50.80	35.75	38.10	52.90	10.00	47.63
			+0.25 -0.25	+0.12 -0.25	±1.25		+0.1 -5.9	+0.8 -0	+1.58 -0.00
1 1/4"	1 1/8"	in	1.25	2.25	1.49	1.63	2.19	0.39	2.13
			+0.01 -0.021	+0.015 -0.015	± 0.037		+0.004 -0.197	+0.031 -0	+0.062 -0.00
		mm	31.75	57.15	37.95	41.28	55.56	10.00	53.98
			+0.25 -0.25	+0.38 -0.38	±0.95		+0.1 -5.00	+0.8 -0	+1.58 -0
1 1/2"	1 1/8"	in	1.50	2.25	1.49	1.63	2.19	0.39	2.13
			+0.01 -0.02	+0.015 -0.015	± 0.037		+0.004 -0.197	+0.031 -0	+0.062 -0.00
		mm	38.10	57.15	37.95	41.28	55.56	10.00	53.98
			+0.25 -0.51	+0.38 -0.38	±0.95		+0.1 -5.00	+0.8 -0	+1.58 -0

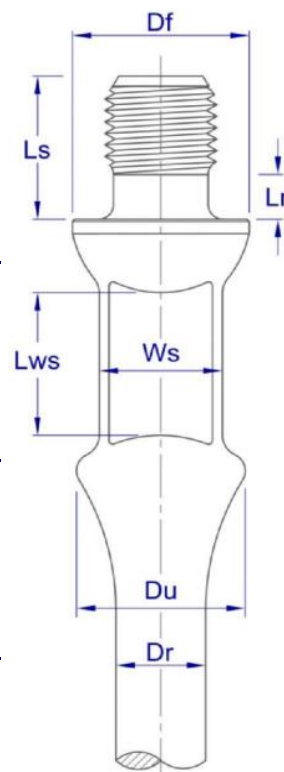

Sucker Rods Nominal Lengths: 25, 30 ft (7.62, 9.14 m)

Pony Rods Nominal Lengths:* 2, 4, 6, 8, 10, 12 ft (0.61, 1.22, 1.83, 2.44, 3.05, 3.66 m)

*Other lengths might be available upon request.

Steel Grades:

The AlphaRod® series was created to overcome more demanding requirements and offer a solution to fatigue and corrosion-fatigue problems. During oil production sucker rods face operative productions that get tougher by the day Mature conventional wells and non-conventional wells expose sucker rods in such ways that lead to an increase in premature fails. The new steel grades of the AlphaRod® generation were specially designed to satisfy these operative conditions.

Chemical Composition:

Typical chemical compositions (wt%) listed in the following table.

Grade	C	Mn	Si	S	P	Cr	Ni	Mo	Others
AlphaRod® HS	0.23	0.55	0.25	0.01 max	0.015 max	0.95	0.30 max	0.45	B: 0.01 max, Ti: 0.1 max, Nb: 0.1 max
AlphaRod® CS	0.23	0.55	0.25	0.01 max	0.010 max	0.95	0.30 max	0.45	B: 0.01 max, Ti: 0.1 max, Nb: 0.1 max
AlphaRod® XS	0.15	0.35	0.25	0.01 max	0.015 max	0.95	0.30 max	0.05 max	B: 0.01 max, Ti: 0.1 max, V: 0.01-0.03

Mechanical Properties:

Mechanical properties are listed in the following table.

Grade	Yield Strength (0.2% offset)	Ultimate Tensile Stress	Elongation (8")	Reduction of area	Hardness
AlphaRod® HS	Min 135 kpsi (Min 931 Mpa)	145 to 160 kpsi (1000 to 1103 MPa)	13% Min	60% Min	35 HRC
AlphaRod® CS	Min 110 kpsi (Min 758 Mpa)	118 to 133 kpsi (814 to 917 MPa)	14% Min	70% Min	26 HRC
AlphaRod® XS	Min 110 kpsi (Min 758 Mpa)	118 to 133 kpsi (814 to 917 MPa)	14% Min	70 % Min	26 HRC

Maxium operative torque:

The maximum operative torque values were determined in full-scale tests.

Tenaris recommends the end user to determine the von mises effective stress of each application and not to exceed the rod body yielding stress.

Tenaris recommends the use of a 0.75 Service Factor depending on the operative conditions (dynamic loading and environment).

Nominal Size		Maxium Operative Torque		
Rod	Pin	AlphaRod® HS	AlphaRod® CS	AlphaRod® XS
1"	7/8"	1380 Lb.ft (1870 N.m)	1124 Lb.ft (1523 N.m)	1124 Lb.ft (1523 N.m)
1 1/8"	7/8"	1380 Lb.ft (1870 N.m)	1124 Lb.ft (1523 N.m)	1124 Lb.ft (1523 N.m)
1 1/8"	1"	2354 Lb.ft (3190 N.m)	1915 Lb.ft (2596 N.m)	1915 Lb.ft (2596 N.m)
1 1/4"	1"	3210 Lb.ft (4352 N.m)	2622 Lb.ft (3544 N.m)	2622 Lb.ft (3544 N.m)
1 1/4"	1 1/8"	3210 Lb.ft (4352 N.m)	2622 Lb.ft (3544 N.m)	2622 Lb.ft (3544 N.m)
1 1/2"	1 1/8"	4270 Lb.ft (5780 N.m)	3477 Lb.ft (4714 N.m)	3477 Lb.ft (4714 N.m)

Maxium Pulling Force:

Grade	Rod Outer Diameter				
	1"	1 1/8"	1 1/8"	1 1/4"	1 1/2"
AlphaRod® HS	84.8 klb (38.8 Ton)	107.4 (48.7 Ton)	107.4 (48.7 Ton)	132.5 klb (60.1 Ton)	190.9 klb (86.6 Ton)
AlphaRod® CS	69 klb (31.3 Ton)	87.5 klb (39.7 Ton)	87.5 klb (39.7 Ton)	108 klb (48.9 Ton)	155.5 klb (70.5 Ton)
AlphaRod® XS	69 klb (31.3 Ton)	87.5 klb (39.7 Ton)	87.5 klb (39.7 Ton)	108 klb (48.9 Ton)	155.5 klb (70.5 Ton)

Color Code:

Rod's ends are painted according to the following table:



Grade	Color Code
AlphaRod® HS	Gold
AlphaRod® CS	Silver
AlphaRod® XS	Copper

*Displayed colors are for guidance only.

Non Destructive Testing:

All raw material is carefully inspected using electromagnetic and/or ultrasonic methods to ensure the soundness of the final product.

Marking:

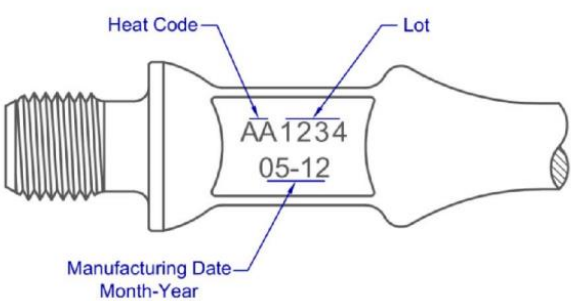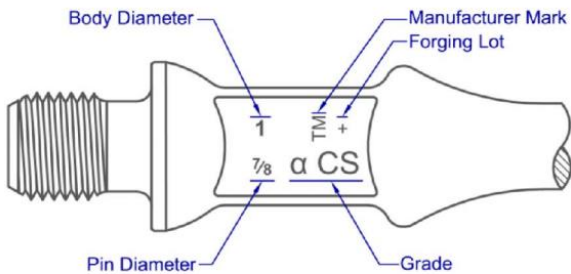

Labeling:*



Tenaris

Metalmecánica S.A.
Ruta 55 Km. 754,1
Villa Mercedes (San Luis)
Made in Argentina

BOX N°		QTY:
PRODUCT: SUCKER RODS		DATE:
SAP CODE:		
SPECIFICATION:		
ROD DIAM:	NET WEIGHT: (kg)	
END DIAM:		
GRADE:		
LENGTH: (ft)		
SALES ORDER:		PACKAGING TYPE:
DESTINATION:		THREAD PROTECTIO

*Image for reference only.

Ordering Information:

When placing an order please attach the following information:

PDS:	SRXTAR
Product Family:	Sucker Rod (or Pony Rod)
Body Diameter:	1"
Pin Diameter:	7/8"
Grade:	AlphaRod® HS
Length:	25 ft

Tenaris has issued this document for general information only, and the information in this document is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information –if any– provided by the user in connection with, or for the purpose of, the information contained hereunder. The use of the information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any information contained hereunder or any use thereof. The information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be. Unless specifically agreed under such contract of sale or services, if Tenaris is required to provide any warranty or assume any liability in connection with the information contained here under, any such warranty or liability shall be subject to the execution of a separate written agreement between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. All rights reserved. ©Tenaris 2024