


Reinforced Pin High Strength Sucker & Pony Rod

Dimensions:

Nominal Size		Units	Dr	Df	Ws	Lws (min)	DU	Lr	Ls
Rod	Pin								
3/4"	7/8"	in	0.75	1.63	1.00	1.25	1.50	0.67	1.63
			+0.008 -0.016	+0.005 -0.01	± 0.031		+0.005 -0.119	+0.031 -0	+0.79 -0
		mm	19.05	41.28	25.40	31.75	38.03	17.07	41.28
			+0.2 -0.41	+0.12 -0.25	±0.79		+0.13 -3.03	+0.79 -0	+1.59 -0
7/8"	1"	in	0.88	2.00	1.11	1.25	1.55	0.80	1.88
			+0.008 -0.016	+0.005 -0.01	± 0.031		+0.005 -0.172	+0.031 -0	+0.79 -0
		mm	22.23	50.80	28.20	31.75	39.37	20.24	47.63
			+0.2 -0.41	+0.13 -0.25	±0.8		+0.13 -4.37	+0.79 -0	+1.59 -0

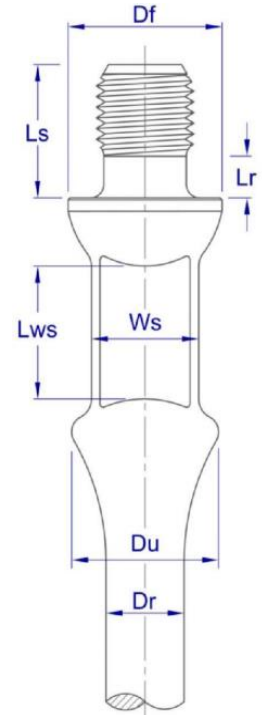

*Dimensions according to API 11B.

Sucker Rods Nominal Lengths: 25, 30 ft (7.62, 9.14 m)

Pony Rods Nominal Lengths:** 2, 4, 6, 8, 10, 12 ft (0.61, 1.22, 1.83, 2.44, 3.05, 3.66 m)

**Other lengths might be available upon request.

Steel Grades:

Tenaris manufactures high-strength sucker rods from quality steel bars to be used in high-flow wells. Products meet the most stringent requirements for greater mechanical strength, thus ensuring quality performance in deep wells with very high loads.

Chemical Composition:

Typical chemical compositions (wt%) listed in the following table.

Grade	C	Mn	Si	S	P	Cr	Ni	Mo	Others
MMS	0.36-0.43	1.00-1.40	0.20-0.40	0.025 max	0.025 max	0.50-1.00	0.30 max	0.25-0.50	V: 0.04-0.08, Nb: 0.05 max
UHS	0.29-0.37	0.70-0.95	0.15-0.35	0.025 max	0.025 max	0.80-1.10	1.65-2.00	0.20-0.30	V: 0.04-0.08

Mechanical Properties:

Mechanical properties are listed in the following table.

Grade	Yield Strength (0.2% offset)	Ultimate Tensile Stress	Elongation (8")	Reduction of area	Hardness
MMS	Min 115 kpsi (Min 793 Mpa)	138 to 155 kpsi (951 to 1069 MPa)	8% Min	30% Min	32 HRC
UHS	Min 115 kpsi (Min 793 Mpa)	140 to 160 kpsi (965 to 1103 MPa)	10% Min	40% Min	34 HRC

Performance Data:

Maxium Pulling Force:

Grade	Rod Outer Diameter	
	3/4"	7/8"
MMS	40.6 klb (18.4 Ton)	55.3 klb (25.1 Ton)
UHS	40.6 klb (18.4 Ton)	55.3 klb (25.1 Ton)

Beam Pumping: Maxium allowable tensile stress

It is recommended that the modified Goodman stress diagram or the simplified formula listed bellow are used in the determination of the allowable range of stress applied to a sucker rod.

$$S_a = \frac{UTS}{A} + B * S_{min} * SF$$

Applied tensions can be compared to the maximum allowable using the Goodman formula:

$$Goodman\% = \frac{S_{max} - S_{min}}{S_a - S_{min}} * 100$$

Table 1: Goodman coefficients.

Grade	A	B
MMS	2.8	0.375
UHS	2.8	0.375

Where:

S_a = Maximum allowable stress (psi or Mpa)

S_{min} = Minimum calculated or measured stress (psi or Mpa)

S_{max} = Maximum calculated or measured stress (psi or Mpa)

UTS = Minimum ultimate tensile strength (psi or Mpa)

SF = Service factor. For corrosive environments a value of 0.9 is recommended

Coefficients A and B are listed on Table 1.

Progressive Cavity Pumping: Effective Stress

The effective rod stress in PCP applications can be calculated using the von Mises equation:

$$\sigma_e = \sqrt{\frac{(C_1 * L^2)}{\pi^2 * D^4} + \frac{C_2 * T^2}{\pi^2 * D^6}}$$

Where:

σ_e = Effective stress (kpsi or Mpa)

L = Total axial load (lbf or N)

T = Total torque (lbf. ft or N. m)

D = Rod's body diameter (in or mm)

C_1 = Constant (For imperial system= 1.6×10^{-5} . For international system= 16)

C_2 = Constant (For imperial system= 0.1106. For international system= 7.68×10^8)

Color Code:

Rod's ends are painted according to the following table:


Grade	Color Code
MMS	Green
UHS	Purple

*Displayed colors are for guidance only.

Non Destructive Testing:

All raw material is carefully inspected using electromagnetic and/or ultrasonic methods to ensure the soundness of the final product.

Marking:

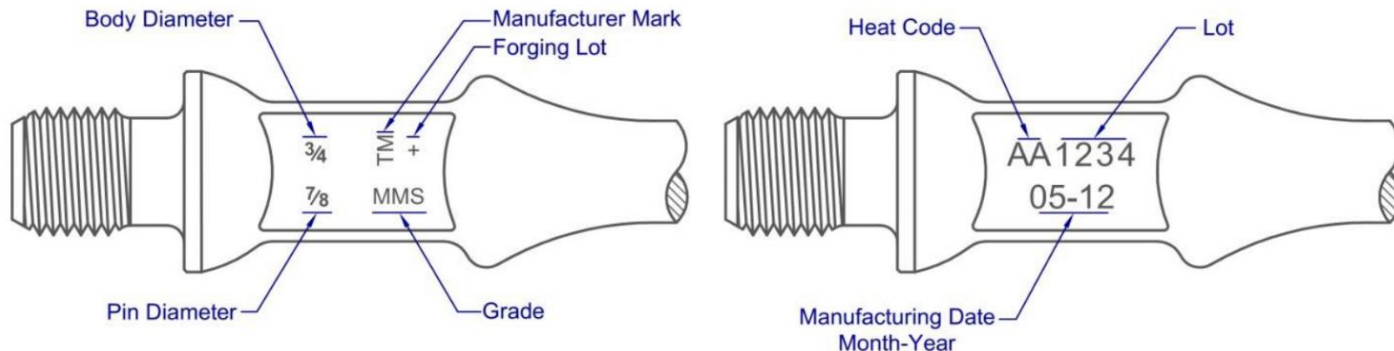

Labeling:*



Metalmecánica S.A.
 Ruta 55 Km. 754,1
 Villa Mercedes (San Luis)
 Made in Argentina

BOX N°		QTY:
PRODUCT: SUCKER RODS		DATE:
SAP CODE:		
SPECIFICATION:		
ROD DIAM:	NET WEIGHT: (kg)	
END DIAM:		
GRADE:		
LENGTH: (ft)		
SALES ORDER:		PACKAGING TYPE:
DESTINATION:		THREAD PROTECTIO:

*Image for reference only.

Tenaris has issued this document for general information only, and the information in this document is not intended to constitute professional or any other type of advice or recommendation and is provided on an "as is" basis. No warranty is given. Tenaris has not independently verified any information –if any- provided by the user in connection with, or for the purpose of, the information contained hereunder. The use of the information is at user's own risk and Tenaris does not assume any responsibility or liability of any kind for any loss, damage or injury resulting from, or in connection with any information contained hereunder or any use thereof. The information in this document is subject to change or modification without notice. Tenaris's products and services are subject to Tenaris's standard terms and conditions or otherwise to the terms resulting from the respective contracts of sale or services, as the case may be. Unless specifically agreed under such contract of sale or services, if Tenaris is required to provide any warranty or assume any liability in connection with the information contained here under, any such warranty or liability shall be subject to the execution of a separate written agreement between petitioner and Tenaris. For more complete information please contact a Tenaris's representative or visit our website at www.tenaris.com. All rights reserved. ©Tenaris 2024

Ordering Information:

When placing an order please attach the following information:

PDS: SRRPHS
Product Family: Sucker Rod (or Pony Rod)
Body Diameter: 3/4"
Pin Diameter: 7/8"
Grade: UHS
Length: 25 ft